
APM-4.5T


DETAILS



PARAPET WALL DETAIL

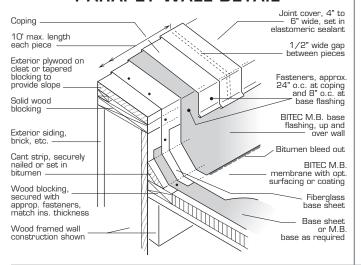


EDGE DETAIL



ROOF DRAIN DETAIL Strainer Optional lead flashing, primed — Clamping ring M.B. target flashing with opt. surfacing or coating Bit. bleed out Opt. lead flashing, primed BITEC Taper M.B. field memb. with insulation 24" to drain 000 opt. surfacing or coating Deck clamp 40" x 40" smooth surface M.B. collar Note: Min. 30" sq., 21/e to 4 lb. lead flashing set on MB membrane in MB sealant. Prime top surface before stripping. Membrane plies and lead flashing extend under clamping ring. Stripping membrane extends 4" beyond edge of flashing sheet, but not beyond the edge of sump. sealed to roof drain flange Base sheet or modified bitumen base as required

VENT PIPE DETAIL

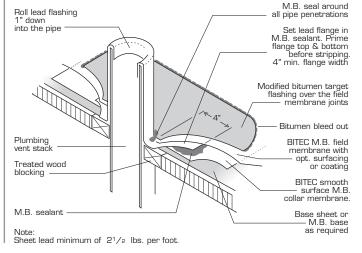

Bitec, Inc.

P.O. Box 497 No. 2 Industrial Park Dr. Morrilton, AR 72110 Phone: 1-800-535-8597 Fax: 501-354-3019

www.bi-tec.com

